


CONCRETE SOLUTIONS



CONCRETE REPAIR

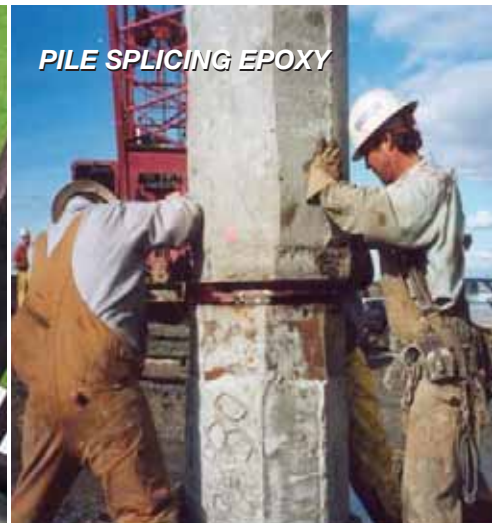

PILE SPLICING EPOXY



LEAK PLUG



NON SHRINK GROUT



CEMENT GRIP



RETROFITTING



INJECTION EPOXY

BUILD RITE
CONSTRUCTION CHEMICALS
Solutions for Professional Builders

CONCRETE SOLUTIONS

STRONGHOLD

General Purpose Non Shrink Cementitious Grout

STRONGHOLD is a non-shrink, cement-based, high strength developing grout which is specially formulated for use in critical grouting operations where positive expansion and non-staining characteristics are required.

STRONGHOLD is an economical and easy to use material requiring the addition of water to produce a free flowing non-shrink grout.

Recommended for:

- To provide heavy duty support beneath load bearing units
- Bedding bearing plates
- Grouting of precast wall panels
- Concrete repairs and pressure grouting
- Anchor bolt fixing

Packaging: Available in 25 kg polythene bag.

CONFIX GROUT 8000

General Purpose Non Shrink Cementitious Grout

CONFIX GROUT 8000 is a non-shrink, cement-based, high strength developing grout which is specially formulated for use in critical grouting operations where positive expansion and non-staining characteristics are required.

CONFIX GROUT 8000 is an economical and easy to use material requiring the addition of water to produce a free flowing non-shrink grout.

Recommended for:

- To provide heavy duty support beneath load bearing units
- Bedding bearing plates
- Grouting of precast wall panels
- Concrete repairs and pressure grouting
- Anchor bolt fixing

Packaging: Available in 25 kg polythene bag.

CONFIX GROUT HPF

Free flowing, high performance non-shrink cementitious grout

CONFIX GROUT HPF is a non-shrink, cement-based, high strength developing grout which is specially formulated for use in critical grouting operations which impart controlled expansion in both the plastic and hardened states. The low water requirement ensures high early strength and long term durability.

CONFIX GROUT HPF is an economical and easy to use material requiring the addition of water to produce a free flowing non-shrink grout.

Recommended for:

- To provide heavy duty support beneath load bearing units
- Bedding bearing plates
- Grouting of pre-cast wall panels
- Anchoring grout for anchor bolts
- Anchor bolt fixing
- Concrete repairs and pressure grouting

Packaging: Available in 25 kg PE bag.

CONFIX GROUT PG

Non Shrink Cementitious Pumping Grout

CONFIX GROUT PG is supplied as a ready to use powder requiring only the addition of water to produce a free flowing non shrink grout for gap widths of 10 – 40mm.

Recommended for:

- To provide heavy duty support beneath load bearing units with narrow gaps
- Concrete repairs and pressure grouting
- Excellent grout for horizontal ducts

Packaging: Available in 25 kg polythene bag.

CEMENT GRIP

Bonding Agent for Concrete, Tiles and Mortar

CEMENT GRIP is supplied as a ready to use powder requiring only the addition of water to produce a free flowing non shrink grout for gap widths of 10 – 40mm.

Recommended for:

- for bonding cementitious floor toppings, renders and repair mortars
- bonding agent for concrete
- resurfacing, renovation, surface restoration
- bonding agent for tiles
- repair cracks and holes in cementitious structures

Packaging: Available in 20 liters plastic pail and 200 liters steel drum.

CONCRETE REPAIR

Cementitious Grout

CONCRETE REPAIR is a non-shrink, cement-based, high strength concrete which is specially formulated for use in repairing damaged concrete and can withstand compression up to 6500 psi. It can bond to new or old concrete. It can also be used in critical grouting operations where positive expansion and non-staining characteristics are required.

Concrete Repair is an economical and easy to use material requiring the addition of water to produce a free flowing non-shrink concrete repair.

Recommended for:

- General patching repair work
- Grouting of precast wall panels
- For general concrete repair
- Ideal repair works for driveways, bridges, seaports, loading bays, parking decks, etc.
- Concrete repairs and pressure grouting

Packaging: Available in 25 kg polyethylene bag.

LEAK PLUG

Rapid setting mortar for plugging leak on running water

LEAK PLUG is supplied as a dry powder which needs only the addition of water to produce an ultra rapid set plugging mortar. It is designed to seal leaks in running water where conventional mortars would be washed away. It is ideal to seal leaks prior to applying waterproof renderings in basement. Upon setting, the product develops excellent structural strength and water tightness.

Recommended for:

- patching concrete and mortars
- repairing water retaining structures
- stopping leaks
- anchoring of bolts and fixtures
- repairing concrete pipe and precast concrete
- filling holes
- repairing honeycombs, cracks and spalls

Packaging: Available in 4 kg and 25 kg pack.

CONFIX GROUT UW

Non-Shrink Cementitious Grout for Underwater Applications

CONFIX GROUT UW is a non-shrink, cement-based, high strength developing grout which is specially formulated for underwater applications. It is supplied as a ready to use powder which requires only the addition of water to produce a flowable, non-shrink grout which exhibits exceptional resistance to cement "wash-out" when placed underwater.

Recommended for:

CONFIX GROUT UW is recommended for repairing structures under water. It is suitable for use under both stationary and moving waters. Areas of applications are:

- Bridge columns/piers
- Concrete piles
- Harbor wall
- Jetty pillars

CONFIX GROUT EP10

Fast Setting Epoxy Grout

CONFIX GROUT EP10 is a 100% solid fast setting epoxy resin specially formulated for grouting applications with high mechanical and adhesive strength.

Recommended for:

- Secure reinforcing rods and tie
- Machinery with high dynamic load, columns and dowels
- Anchor bolt fixing
- Concrete repairs and pressure grouting

Packaging: Available in 3 kgs set.

CONFIX MORTAR 101

Cementitious Concrete Repair Compound

CONFIX MORTAR 101 is a cementitious pre-packed repair mortar with shrinkage compensation properties. It is supplied as a single component powder which only needs mixing with specific quantity of water to produce a non-shrink mortar allowing vertical application of 40mm thickness in a single layer without the use of formwork.

Recommended for:

- general patching repair work
- filling voids
- horizontal, vertical and overhead applications

Packaging: Available in 25 kg plastic bags.

CONFIX PAVE PATCH 203

Cementitious Rapid Setting Repair Mortar for Pavement and floors

CONFIX PAVE PATCH 203 is a cementitious pre-packed repair mortar with shrinkage compensation properties. It is supplied as a single component powder which only needs mixing with a specific quantity of water to produce a non-shrink, free flowing, fast setting and high strength mortar. It is a blend of inorganic cement, special fillers and chemical additives to control the rate of strength gain.

The cured mortar is durable and weather resistant and has excellent adhesion to concrete substrates. Its polymer modification provides good resistance to water, abrasion and impact.

CONFIX PAVEPATCH 203 is ideal for use in heavily trafficked areas where a rapid return to service in 2 – 3 hours is critical.

Recommended for:

- general patching repair work
- emergency reinstatement of deteriorated concrete
- for repair of runways and apron
- areas where wheeled traffic requires fast return to service
- ideal repair works for driveways, bridges, seaports, loading bays, parking decks, etc.

Packaging: Available in 25 kg plastic bags.

CONFIX PAVER-CRETE

Cementitious Compound for Re-instatement of Concrete Pavements

CONFIX PAVER-CRETE is a cementitious pre-packed repair mortar specially designed for resurfacing, patching and repairing large areas of concrete. It is supplied as a single component powder which only needs mixing with a specific quantity of water to produce a non-shrink and rapid strength-gain mortar. It is based of a blend of special cement, modifying additives to control rate of setting and strength gain plus selected hard wearing aggregate.

Recommended for:

- General patching repair work
- Resurfacing of worn out concrete floors
- Patching and repairing of damaged concrete surfaces
- Topping of new and old concrete floors
- ideal repair works for driveways, warehouses, car parks, loading bays, concrete roads, etc.

Packaging: Available in 25 kg plastic bags.

CONFIX GROUT 5000

General purpose non-shrink cementitious grout, 5,000 PSI

CONFIX MORTAR 2FR

Two component, polymer fiber reinforced, shrinkage. Compensated repair mortar

CONFIX GROUT HS

High Strength Non Shrink Cementitious Grout

CONFIX GROUT EP40

Epoxy Resin Based Grout

CONFIXURE WB

Wax Based Concrete Curing Compound

CONFIXURE SP 15

Standard Polymeric Concrete Curing Membrane

CONFIX EPOBOND IJ

Standard epoxy injection resin

CONFIX EPOBOND IJ/UW

Underwater epoxy injection resin

CONFIX EPOBOND STD

Epoxy resin concrete bonding agent

CONFIX EPOBOND SS

Epoxy resin concrete bonding agent

CONFIX EPOBOND PSE

Pile splicing epoxy

CONFIX EPOPRIME

Epoxy resin based primer for resin products

CONFIX ACRIBOND

Acrylic emulsion cement modifier and concrete bonding agent

CONFIX BOND PMA

Polymer bonding aid and mortar additive

CONFIX BOND CMT

Bonding agent for concrete, tiles and mortar

CONFIX EPOBOND PUTTY

Epoxy resin putty

Distributed by:

MAGNA PRIME DISTRIBUTION CORPORATION

#30 Kapiligan St., Brgy., Doña Imelda, Quezon City

Tel: (+632) 715-8130 to 32 | Fax: (+632) 715-8133

www.magnaprime.com.ph

BUILD RITE
CONSTRUCTION CHEMICALS

Solutions for Professional Builders